

FD-0.6/1KV-CV



FD-0.6/1KV-CV

IEC 60502-1

0.6/1 kV 90°C CROSS-LINKED POLYETHYLENE INSULATED PVC SHEATHED FLAME RETARDANT POWER CABLE



CROSS SECTIONAL AREA (MM2) ขนาดพื้นที่หน้าตัด (ตร.มม.)	PRICE (BAHT/METER) ราคา/ เมตร				ส่วนลด % DIS %
	FD-0.6/1KV-CV				
	1C	2C	3C	4C	
2.5	26.29	59.54	74.45	91.89	-
4	33.18	75.42	97.05	120.99	-
6	43.47	98.74	128.42	161.05	-
10	57.43	126.45	173.87	236.04	-
16	85.53	195.35	266.10	348.47	-
25	127.19	303.81	411.95	538.62	-
35	175.62	410.12	557.85	730.37	-
50	242.00	546.96	751.29	995.87	-
70	339.18	758.76	1,060.82	1,402.06	-
95	467.98	1,045.45	1,451.45	1,931.82	-
120	593.40	1,317.85	1,847.27	2,456.14	-
150	727.27	1,617.77	2,272.73	3,026.86	-
185	908.34	2,010.30	2,852.73	3,810.50	-
240	1,189.30	2,628.60	3,724.28	4,989.71	-
300	1,506.71	3,295.15	4,664.60	6,511.87	-
400	1,927.84	4,193.81	6,082.47	8,216.49	-
500	2,574.67	-	-	-	-
630	3,292.18	-	-	-	-
800	4,128.87	-	-	-	-
1000	5,442.84	-	-	-	-

*** ส่วนลด กรุณาติดต่อบริษัท ***


FD-0.6/1KV-CV-SWA



FD-0.6/1KV-CV-SWA

IEC 60502-1

0.6/1 kV 90°C CROSS-LINKED POLYETHYLENE INSULATED PVC SHEATHED, WITH GALVANIZED STEEL WIRES ARMORED FLAME RETARDANT POWER CABLE

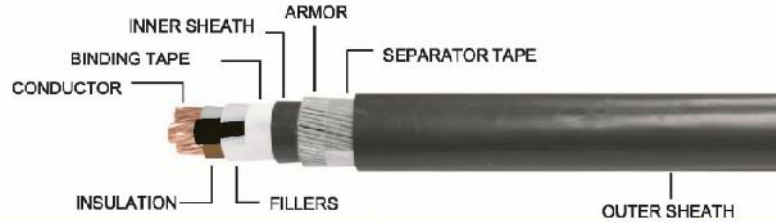

CROSS SECTIONAL AREA (MM2) ขนาดพื้นที่หน้าตัด (ตร.มม.)	FD-0.6/1KV-CV - SWA			ส่วนลด % DIS %
	PRICE (BAHT/METER) ราคา/ เมตร			
	2C	3C	4C	
1.5	124.00	138.50	157.80	
2.5	141.70	162.60	186.80	-
4	177.10	206.00	238.30	-
6	220.60	270.50	318.80	-
10	276.90	344.50	421.80	-
16	375.10	486.20	589.30	-
25	544.20	676.20	837.20	-
35	647.20	813.00	1,022.40	-
50	856.50	1,107.70	1,391.00	-
70	1,127.00	1,449.00	1,882.10	-
95	1,505.40	1,962.60	2,482.60	-
120	1,822.50	2,395.70	3,030.00	-
150	2,173.50	2,849.70	3,690.10	-
185	2,656.50	3,537.20	4,559.50	-
240	3,397.10	4,562.70	6,050.40	-
300	4,256.80	5,770.20	7,589.50	-

*** ส่วนลด กรุณาคิดต่อบริษัท ***